POINT LEVEL SENSORS

Drum Level Indicators

LV-110 Series Starts at

\$304



Compatible with Most Liquids and Chemicals Models Rated to Maximum 750 psi

Drum Level Indicators Require No Electricity

The LV-110 Series drum level indicators are compact, self-contained liquid-level indicators designed for use in 55-gallon drums. A magnet-equipped float senses level, and the user can obtain a readout by removing the protective cap and reading the indicator measuring tape.
LV-110 units can be used in either horizontal or vertical drums.

Temperature Range:


316 SS: 0 to 300°F Brass/Buna-N:

0.6 to 82°C (33 to 180°F) in water, -17 to 110°C (0 to 230°F) in oil

Pressure Rating: 750 psi for 316 SS float; 150 psi for Buna-N floats

Mounting: 2 NPT

Tube/Fitting Size: ½" OD tube
Mounting Attitude: Vertical ±30°

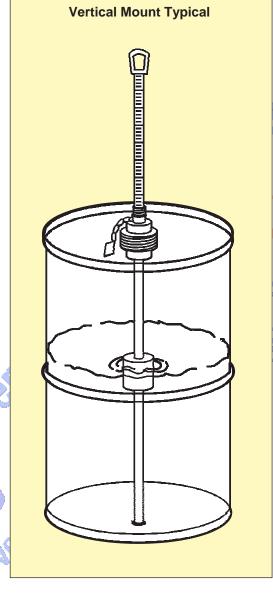



To Order (Specify Model Number) Length (L) Drum Position **Float Specific** Stem/Float Model No. **Price** Gravity LV-110 \$304 22" horizontal Brass/Buna-N 0.48 LV-111 658 22" horizontal 316 SS 0.64 LV-112 334 33" vertical Brass/Buna-N 0.48 LV-113 734 316 SS 33" vertical 0.64 LV-115 414 PVC 33" vertical 0.8 ES-2208 129 Reference Book: Hands-On Watter and Watewater Equipment Volume II

Ordering Example: LV-113, 316 SS drum level indicator, 33" vertical, \$734.